



Safety and Performance in Motion



SINCE 1959



NANKANG RUBBER TIRE CORP.,LTD.
Suite 608, No.136,Sec 3,Jen Ai Rd., Taipei City,Taiwan
TEL +886-2-27071000 FAX+886-2-27066411

The Nankang Story



/ Over 65 Years of Industrious Work, all Dedicated to Motoring Safety

Nankang is proud of our quality products produced over the years. Yet we never cease to pursue excellence in both our R&D and manufacturing processes.

Nankang Rubber Tire's heritage runs deep; having the longest history among the tire manufacturers in Taiwan. For over 65 years, guided by our corporate motto, "Integrity, Pragmatism, and Innovation", we have persisted in creating performance and growth. In response to increasingly discerning market demands, we have strived aggressively towards our goals of "product innovation with R&D, differentiation from competition, product quality upgrading, customer satisfaction, after-sale service and professional management," in order to offer more and more innovative products.

/ Over 65 Years of Honor and Recognition, Winning Numerous Awards with our Effort in R&D

Over the past 65 years, our continuous efforts in keeping up with the advancement of technology and product quality control have proven to be fruitful not only in developing many innovative and durable products, but also bringing us numerous global awards in Quality Assurance.

/ Over 65 Years of Business Splendor, High Time to Turn a New Page

Nankang Rubber Tire's corporate logo has been in use for more than 65 years. Facing increasingly fierce competition from the global tire industry and considering the trend of corporate reforms, in 2010 Nankang embarked upon a review of its corporate identity system "CIS". Through this new project, we aim to build a new Nankang Tire brand image, of world standard. Being able to keep up with the times, the company will proudly move on to the next splendid century of its corporate history.

/ Mastering the Colorful World Stage with a New CIS

A passionate yet steadfast symbol, the **N**, represents Nankang Rubber Tire's sustainable business philosophy, and her corporate spirit. Care for the customer is always of paramount importance.

The CIS employs a duo color combination of red and black. The Red color expresses Nankang's corporate spirit of high passion, respect for customers, energy and vitality. The Black color highlights the strength and stability of her tire business and represents an image of generosity, grandeur, professionalism and trustworthiness.

Whether it be for cruising the highway, striding over an icescape, or conquering a dilapidated off-road track, for over 65 years, Nankang Tire has offered drivers safe innovative motoring, with a spirit as unbreakable as the tires she manufactures.

From her humble beginnings, Nankang has advanced across five continents, and covered more than 100 countries globally. From tire industry leader in Taiwan, Nankang is now steadily driving her way onto the global stage with unlimited opportunity.

Our Commitment to the Environment



Nankang realizes the fact that we are a part of the Earth's Eco system, and so we take pride in our responsibility to provide a better environment for future generations. Our commitment is evident right throughout the manufacturing process. Our raw materials are formulated to lower pollution emissions. As such, our suppliers are required to provide raw materials which conform to all relevant internationally recognized environmental regulations.

Extended Tire Life for Better Value and a Better Environment

Extending the durability of tires not only creates higher economic value for drivers, but also reduces the impact of scrapped tires upon the environment. To achieve this, Nankang uses highly structured chemical agents to lessen tread wear, and unique additives designed to slow the tire aging process. High pressure-bearing materials are applied, to enable tires to be properly inflated. While value and safety are essential to customer satisfaction, product quality and performance are never compromised.

Conformity to Regulations with HA (High Aromatic)-Oil Free Formula for VOC Reduction

Nankang tire compounds are formulated to meet the European Union's regulations on environmental protection which came into force in 2010. HA-oil free compounds are used across the major portion of our product line. In addition, necessary measures are taken to reduce volatile organic compound (VOC) generation in our manufacturing, thus eliminating further pollution in the process.

Lower Rolling Resistance for Fuel Saving and Carbon Dioxide Emission


Fuel consumption and carbon dioxide emissions are direct functions of a tire's rolling resistance. Lowering rolling resistance is one of the top priorities for our product development. High dispersible silica and unique cross linking agents are applied in our formula to achieve the stable integration of natural, synthetic rubber and silica, which leads to the advanced result of lower rolling resistance, less heat generation and better grip performance.



INDEX

 NANKANG

The Nankang Story	P.01-02
Our Commitment	P.03-04
Inch Up	P.39-42
Safty	P.43-44
European Tire / ETRTO Regulations	P.45-46

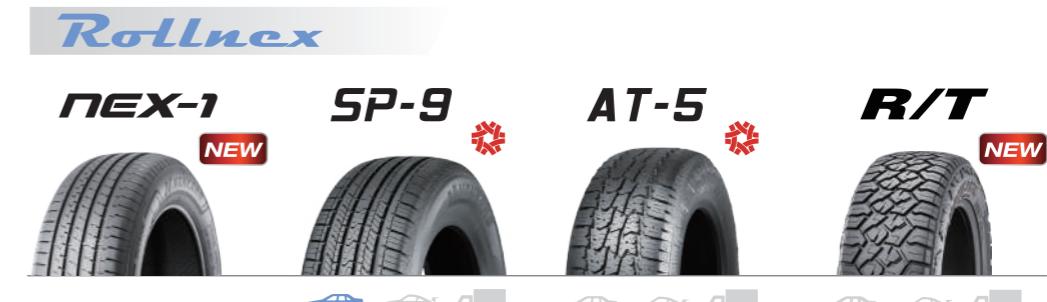

N NANKANG

Sportnex

Sportnex



N Safety and Performance in Motion

Sportnex AS-3^{EV}



- Perfect collocation for AS-3 EV involving new generation rubber and nanomaterials contributes excellent tire performance including grade B of rolling resistance and grade A of wet grip on EU labels with treadwear mileage of more than 40,000 kilometer.
- Sound pressure distribution for AS-3 EV was simulated and calculated with acoustics software to suppress annoying noise and enhance driving comfort.
- Weight of electric vehicles is higher than petrol vehicles at same class. For that, AS-3 EV designed for electric vehicles adopts high strength belt cover to upgrade tire stiffness and also reduce rolling resistance for achieving energy saving request. Besides, with chamfering lateral grooves on tread shoulder, it can avoid pattern block deformation in later usage.
- The special design on the outer edge of the tire creates a high-quality visual and tactile experience.



Sportnex AS-3



- Perfect collocation for AS-3 EV involving new generation rubber and nanomaterials contributes excellent tire performance including grade B of rolling resistance and grade A of wet grip on EU labels with treadwear mileage of more than 40,000 kilometer.
- Sound pressure distribution for AS-3 EV was simulated and calculated with acoustics software to suppress annoying noise and enhance driving comfort.
- Weight of electric vehicles is higher than petrol vehicles at same class. For that, AS-3 EV designed for electric vehicles adopts high strength belt cover to upgrade tire stiffness and also reduce rolling resistance for achieving energy saving request. Besides, with chamfering lateral grooves on tread shoulder, it can avoid pattern block deformation in later usage.
- The special design on the outer edge of the tire creates a high-quality visual and tactile experience.

AS-3EV Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL		
								RRC	Wet Grip	Noise Value (dB)
40'	20	255/40ZR20	101(XL)	W	9	712	260	B	A	71
	19	235/40ZR19	96(XL)	W	8.5	671	241	B	A	72
	20	275/45ZR20	110(XL)	Y	9	756	273	B	A	73
45'	20	255/45ZR20	105(XL)	Y	8.5	738	255	B	A	72
	19	255/45ZR19	104(XL)	W	8.5	713	255	B	A	72
	18	235/45ZR18	98(XL)	Y	8	669	236	B	A	72

AS-3 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm) (mm)	SW (mm)	EU TIRE LABEL		
								RRC	Wet Grip	Noise Value (dB)
30'	23	325/30ZR23	109(XL)	Y	11.5	780	331	C	A	73
	22	315/30ZR22	107(XL)	Y	11	749	320	C	A	73
	19	255/30ZR19	91(XL)	Y	9	637	260	N/A		
35'	19	245/30ZR19	89(XL)	Y	8.5	631	248	N/A		
	23	325/35ZR23	115(XL)	Y	11.5	812	331	C	A	73
	23	285/35ZR23	107(XL)	Y	10	784	290	B	A	73
40'	22	275/35ZR22	104(XL)	Y	9.5	751	278	C	A	73
	21	285/35ZR21	105(XL)	Y	10	733	290	C	A	73
	21	235/35ZR21	89	W	8.5	697	241	N/A		
45'	20	315/35ZR20	110(XL)	Y	11	728	320	B	A	73
	20	285/35ZR20	104(XL)	Y	10	708	290	C	A	73
	20	275/35ZR20	102(XL)	Y	9.5	700	278	C	A	73
50'	20	235/35ZR20	92(XL)	Y	8.5	672	241	C	A	72
	19	255/35ZR19	96(XL)	Y	9	661	260	N/A		
	19	245/35ZR19	93(XL)	Y	8.5	655	248	N/A		
55'	19	235/35ZR19	91(XL)	Y	8.5	647	241	N/A		
	19	225/35ZR19	88(XL)	Y	8	641	230	D	A	72
	19	215/35ZR19	85(XL)	Y	7.5	633	218	C	A	72
60'	18	165/35R18	82(XL)	V	6	573	170	N/A		
	17	185/35R17	82(XL)	V	6.5	562	188	N/A		
	17	165/35R17	75(XL)	V	6	548	170	N/A		
65'	23	285/40ZR23	111(XL)	Y	10	812	290	B	A	73
	21	255/40ZR21	102(XL)	Y	9	737	260	C	A	73
	20	255/40ZR20	101(XL)	Y	9	712	260	N/A		
70'	19	275/40ZR19	105(XL)	Y	9.5	703	278	N/A		
	19	255/40ZR19	100(XL)	Y	9	687	260	N/A		
	19	245/40ZR19	98(XL)	Y	8.5	679	248	N/A		
75'	18	255/40ZR18	99(XL)	Y	9	661	260	N/A		
	18	235/40ZR18	95(XL)	Y	8.5	645	241	N/A		
	18	235/40R18	95(XL)	H	8.5	645	241	N/A		
80'	18	225/40ZR18	92(XL)	Y	8	637	230	N/A		
	18	225/40R18	92(XL)	H	8	637	230	N/A		
	18	215/40R18	89(XL)	W	7.5	629	218	N/A		
85'	18	215/40R18	89(XL)	H	7.5	629	218	N/A		
	18	205/40R18	86(XL)	Y	7.5	621	212	N/A		
	18	205/40R18	86(XL)	H	7.5	621	212	N/A		
90'	17	205/40R17	84(XL)	V	7.5	596	212	N/A		
	17	195/40ZR17	81(XL)	W	7	588	200	N/A		
	17	195/40R17	81(XL)	V	7	588	200	N/A		
95'	17	165/40R17	75(XL)	V	6	564	170	N/A		
	21	235/45ZR21	101(XL)	Y	8	745	236	N/A		
	21	225/45ZR21	95	W	7.5	735	225	N/A		
100'	20	245/45ZR20	103(XL)	Y	8	728	243	N/A		
	20	235/45ZR20	100(XL)	W	8	720	236	N/A		
	20	215/45R20	95(XL)	V	7	702	213	N/A		
105'	18	255/45ZR18	103(XL)	Y	8.5	687	255	N/A		
	18	245/45ZR18	100(XL)	Y	8	677	243	N/A		
	18	235/45ZR18	98(XL)	Y	8	669	236	N/A		
110'	18	225/45ZR18	95(XL)	Y	7.5	659	225	C	A	72

N/A =Values are not available at the time of publication.

Sportnex AS-2+



- The void ratio of the inside and outside are respectively 38% and 34%, which improve drainage efficiency and wet handling.
- With broadened circumferential groove width, the section area of inside/outside grooves are increased 21.3% and 43.8% respectively compared to the conventional design. The grooves allow more water containing for better drainage performance.
- Brand new profile design and reinforced sidewall design upgrade tire stiffness.
- Serrated wall of circumferential grooves discharges water effectively and reduces the noise caused by the friction between airflow and groove wall.
- Brand new profile design and reinforced sidewall design upgrade tire stiffness.

AS-2+ Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL		
								RRC	Wet Grip	Noise Value (dB)
25'	20	295/25ZR20	95(XL)	Y	10.5	656	301	D	A	75 B
	20	285/25ZR20	93(XL)	Y	10.5	650	295	D	A	73 B
	21	285/30ZR21	100(XL)	Y	10	705	290	C	A	73 B
	21	275/30ZR21	98(XL)	Y	9.5	699	278	D	A	71 B
	21	245/30ZR21	91(XL)	Y	8.5	681	248	D	A	71 B
	21	235/30ZR21	91(XL)	Y	8.5	675	241	D	A	71 B
	20	285/30ZR20	99(XL)	Y	10	680	290	C	A	73 B
	20	275/30ZR20	97(XL)	Y	9.5	674	278	C	A	71 B
	20	265/30ZR20	94(XL)	Y	9.5	668	271	D	A	71 B
	20	255/30ZR20	92(XL)	Y	9	662	260	D	A	71 B
30'	20	245/30ZR20	90(XL)	Y	8.5	656	248	D	A	71 B
	19	275/30ZR19	96(XL)	Y	9.5	649	278	C	A	71 B
	22	285/35ZR22	106(XL)	W	10	759	290	C	A	71 A
	21	275/35ZR21	103(XL)	Y	9.5	725	278	C	A	71 B
	21	255/35ZR21	98(XL)	Y	9	711	260	D	A	71 B
	21	245/35ZR21	96(XL)	Y	8.5	705	248	D	A	71 B
	20	315/35ZR20	110(XL)	Y	11	728	320	C	A	72 A
	20	295/35ZR20	105(XL)	Y	10.5	714	301	C	A	73 B
	20	275/35ZR20	102(XL)	Y	9.5	700	278	C	A	71 B
	20	265/35ZR20	99(XL)	Y	9.5	694	271	C	A	71 B
35'	20	255/35ZR20	97(XL)	Y	9	686	260	C	A	71 B
	20	245/35ZR20	95(XL)	Y	8.5	680	248	C	A	71 B
	20	225/35ZR20	93(XL)	Y	8	666	230	D	A	71 B
	19	285/35ZR19	103(XL)	Y	10	683	286	D	A	71 A
	19	275/35ZR19	96	Y	9.5	675	278	C	A	71 B
	* 19	275/35RF19	96	Y	9.5	675	278	D	A	71 B
	19	265/35ZR19	98(XL)	Y	9.5	669	271	C	A	71 B
	19	255/35ZR19	96(XL)	Y	9	661	260	D	A	71 B
	* 19	255/35RF19	96(XL)	Y	9	661	260	D	A	71 B
	19	245/35ZR19	93(XL)	Y	8.5	656	248	C	A	71 B
40'	19	235/35ZR19	91(XL)	Y	8.5	647	241	D	A	71 B
	19	225/35ZR19	88(XL)	Y	8	641	230	C	A	71 B
	* 19	225/35RF19	88(XL)	Y	8	641	230	D	A	71 B
	18	275/35ZR18	99(XL)	Y	9.5	649	278	C	A	71 B
	18	265/35ZR18	97(XL)	Y	9.5	643	271	D	A	71 B
	18	255/35ZR18	94(XL)	Y	9	635	260	D	A	71 B
	18	245/35ZR18	92(XL)	Y	8.5	629	248	D	A	71 B
	18	225/35ZR18	87(XL)	Y	8	615	230	D	A	71 B
	17	225/35ZR17	86(XL)	Y	8	590	230	D	A	71 B
	17	215/35ZR17	86(XL)	Y	8	575	223	D	A	71 B
45'	18	225/40ZR18	99	Y	9.5	677	278	D	A	71 B
	18	245/40ZR18	97(XL)	Y	8.5	653	248	C	A	71 B
	19	235/40ZR19	93(XL)	Y	8	663	230	C	A	71 B
	* 19	225/40RF19	93(XL)	Y	8	663	230	D	B	71 B
	18	275/40ZR18	103(XL)	Y	9.5	677	278	D	A	71 B
	* 18	275/40RF18	99	Y	9.5	677	278	D	A	71 B
	18	245/40ZR18	97(XL)	Y	8.5	653	248	C	A	71 B
	* 18	245/40RF18	97(XL)	Y	8.5	653	248	D	A	71 B
	18	235/40ZR18	95(XL)	Y	8.5	653	248	D	A	71 B
	17	215/40R17	87(XL)	V	7.5	604	218	D	A	71 B
50'	17	215/40R17	87(XL)	V	7.5	604	218	D	A	71 B
	17	205/40R17	84(XL)	V	7.5	596	212	D	A	71 B
	16	215/40R16	86(XL)	V	7.5	578	218	D	A	71 B
	16	195/40ZR16	80(XL)	W	7	562	200	D	B	71 B
	21	265/45ZR21	104	W	9	771	266	C	A	71 B
	20	245/45ZR20	103(XL)	Y	8	728	243	C	A	71 B
	20	235/45ZR20	100(XL)	W	8	720	236	C	A	71 B
	* 19	245/45RF19	102(XL)	Y	8	703	243	D	A	71 B
	* 19	235/45RF19	95	W	8	695	236	D	A	71 B
	19	225/45ZR19	96(XL)	W	7.5	685	225	C	A	71 B
55'	* 18	245/45RF18	100(XL)	W	8	677	243	D	A	71 B
	18	245/45ZR18	100(XL)	Y	8	677	243	C	A	71 B
	18	235/45ZR18	98(XL)	W	8	669	236	C	A	71 B
	18	225/45ZR18	95(XL)	Y	7.5	659	225	D	A	71 B
	* 17	255/45ZR17	98	Y	8.5	662	255	D	A	71 B
	17	225/45RF17	91	W	7.5	634	225	D	B	71 B
	17	225/45ZR17	94(XL)	W	7.5	634	225	C	A	71 B
	17	225/45ZR17	94(XL)	Y	7.5	634	225	C	A	71 B
	17	225/45R17	91(XL)	W	7	626	213	C	A	71 B
	17	215/45R17	91(XL)	V	7	626	213	D	A	71 B
60'	17	205/45R17	88(XL)	V	7	616	206	D	A	71 B
	16	245/45ZR16	94	W	8	626	243	D	A	71 B
	16	215/45R16	90(XL)	V	7	600	213	D	A	71 B
	16	205/45R16	87(XL)	V	7	590	206	D	A	71 B

Sportnex NS-2R



- Using the latest tyre technology, the new NS-2R boasts massive performance for both road and track. Available in a growing size range from 13" up to 18", the NS-2R is not a tyre to be overlooked by anybody looking for high performance rubber. Available in two compounds Track (soft) and Street (medium) there is an NS-2R to suit everybody's performance tyre needs.
- The NS-2R is the control tyre for race championships such as the English and Scottish Compact Cup, 330 Challenge, Tegiwa Civic Cup, M3 Cup and MaX5 championship, the NS-2R is proving very popular in the pits and amongst driving enthusiasts.
- Whilst most track tyres only have one thing in mind, the NS-2R hosts an array of talents, not only as a fast tyre, but as a consistently fast tyre, lap after lap come rain or shine. The tread design also gives the driver the confidence to drive to and from a race meeting or track day in dry or often wet conditions without the need to change tyres at the event.
- TREADWEAR index : 120 (track*), 180 (street*) and the new 100/80 (race*)
- All compounds are road legal with the exception of certain sizes

NS-2R Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL		
								RRC	Wet Grip	Noise Value (dB)
30'	20	305/30ZR20	103(XL)	Y	11	692	313	D	B	75 B
	19	275/30ZR19	96(XL)	Y	9.5	649	278	E	B	73 B
	19	265/30ZR19	93(XL)	Y	9.5	643	271	E	B	73 B
	18	315/30ZR18	98	Y	11	647	320	D	B	74 B
	18	295/30ZR18	98(XL)	Y	10.5	635	301	E	B	75 B
	18	285/30ZR18	93	Y	10	629	290	E	B	74 B
35'	20	285/35ZR20	100	Y	10	708	290	E	B	74 B
	20	265/35ZR20	99(XL)	Y	9.5	694	271	D	B	73 B
	19	245/35ZR19	93(XL)	Y	8.5	656	248	E	B	72 B
	19	235/35ZR19	91(XL)	Y	8.5	647	241	E	B	72 B
	18	285/35ZR18	101(XL)	Y	10	657	290	E	B	74 B
	18	265/35ZR18	97(XL)	Y	0	0	0	E	B	73 B
	18	255/35ZR18	94(XL)	Y	9	635	260	E	B	73 B
	18	225/35ZR18	87(XL)	Y	8	615	230	E	B	72 B
40'	18	215/35ZR18	84(XL)	Y	7.5	607	218	D	B	71 B
	20	255/40ZR20	101(XL)	Y	9	712	260	E	B	73 B
	18	245/40ZR18	97(XL)	W	8.5	653	248	D	B	72 B
	18	235/40ZR18	95(XL)	Y	8.5	645	241	E	B	72 B
	18	225/40ZR18	92(XL)	Y	8	637	230	D	B	71 B
	17	255/40ZR17	98(XL)	W	9	636	260	D	B	73 B
	17	255/40ZR17	94	W	0	0	0	N/A		
	17	245/40ZR17	91	W	8.5	628	248	E	B	71 B
17	17	235/40ZR17	94(XL)	W	8.5	620	241	E	B	72 B
	17	205/40ZR17	84(XL)	W	7.5	596	212	D	B	71 B

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL		
								RRC	Wet Grip	Noise Value (dB)
45'	18	265/45ZR18	101	Y	9	695	266	E	B	72 B
	18	235/45ZR18	98(XL)	Y	8	669	236	D	B	72 B
	18	225/45ZR18	95(XL)	W	7.5	659	225	E	B	71 B
	18	215/45ZR18	93(XL)	W	7	651	213	D	B	71 B
	17	235/45ZR17	97(XL)	W	8	644	236	E	B	72 B
	17	225/45ZR17	94(XL)	W	7.5	634	225	D	B	71 B
	17	215/45ZR17	91(XL)	W	7	626	213	D	B	71 B
	17	205/45ZR17	88(XL)	W	7	616	206	E	B	71 B
	17	195/45ZR17	85(XL)	Y	6.5	608	195	E	B	71 B
	16	225/45ZR16	93(XL)	W	7.5	608	225	E	B	71 B
50'	16	215/45ZR16	86	W	7	600	213	N/A		
	16	205/45ZR16	87(XL)	W	7	590	206	E	B	71 B
	16	195/45R16	84(XL)	V	6.5	582	195	D	B	71 B
	15	225/45ZR15	91(XL)	W	7.5	583	225	D	B	71 B
	16	195/50ZR16	88(XL)	W	6	602	201	D	B	71 B
	16	165/50R16	75	V	5	572	170	N/A		
	15	325/50R15	110	H	10	707	336	N/A		
	15	295/50R15	108	H	9.5	677	309	D	B	74 B
	15	275/50R15	102	H	8.5	657	284	N/A		
	15	245/50R15	96	H	7.5	627	253	N/A		
55'	15	205/50ZR15	89(XL)	W	6.5	587	214	E	B	71 B
	15	195/50ZR15	86(XL)	W	6	577	201	E	B	71 B
	15	165/50R15	73	V	5	547	170	N/A		
	13	175/50R13	72	V	5.5	506	182	N/A		
	16	205/55ZR16	91	W	6.5	632	214	E	B	71 B
	16	205/55ZR16	94(XL)	W	6.5	632	214	D	B	71 B
	15	295/55R15	110	H	9.5	705	313	N/A		
	15	225/55R15	93	H	7	629	233	N/A		
60'	15	195/55ZR15	89(XL)	W	6	595	201	E	B	71 B
	15	185/55R15	82	V	6	585	194	N/A		
	15	165/55R15	75	V	5	563	170	N/A		
	14	165/55R14	72	V	5	538	170	N/A		
	15	315/60R15	114	H	9.5	759	323	N/A		
	15	275/60R15	107	H	8	711	279	N/A		
	15	255/60R15	102	H	7.5	687	260	N/A		
	15	235/60R15	98	H	7	663	240	N/A		
65'	14	185/60R14	86(XL)	V	5.5	578	189	E	B	71 B
	14	175/60R14	79	V	5	566	177	N/A		
	13	185/60R13	84(XL)	V	5.5	552	189	E	B	

Sportnex
NS-20


--	--	--	--	--	--	--	--



Wet Grip

Low Noise

- The 4 straight wide grooves enhance tire hydroplaning and maneuverability on wet road condition.
- New silica tread compound makes NS-20 have excellent grip ability.
- The two sub straight grooves on tire shoulder not only share the main grooves hydroplane, but reduce tread wear efficiently.
- The kerfs can reduce pattern noise cause by tire rolling.
- Sipes on tire shoulder reduce tire block rigidity, lower the noise from road, and increase comfort ability.

NS-20 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (mm)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise (dB)	Noise Class
30'	22	245/30ZR22	95(XL)	W	8.5	707	248	D	C	72	B
30'	22	225/30ZR22	87(XL)	W	8	695	230	D	C	72	B
30'	20	285/30ZR20	99(XL)	Y	10	680	290	D	C	72	A
30'	20	275/30ZR20	97(XL)	Y	9.5	674	278	D	A	72	B
30'	20	255/30ZR20	92(XL)	Y	9	664	260	D	A	72	B
30'	20	245/30ZR20	95(XL)	Y	8.5	656	248	D	A	72	B
30'	20	235/30ZR20	88(XL)	Y	8.5	650	242	D	A	72	B
30'	20	225/30ZR20	85(XL)	W	8	644	230	D	C	72	B
30'	20	215/30ZR20	82(XL)	W	7.5	638	218	D	C	72	B
30'	19	305/30ZR19	102(XL)	Y	11	667	313	D	C	72	A
30'	19	295/30ZR19	100(XL)	Y	10.5	661	301	D	C	74	B
30'	19	285/30ZR19	98(XL)	Y	10	655	290	D	A	72	A
30'	19	275/30ZR19	96(XL)	Y	9.5	649	278	D	C	72	B
30'	19	265/30ZR19	93(XL)	Y	9.5	643	271	D	C	72	B
30'	19	255/30ZR19	91(XL)	Y	9	637	260	D	A	72	B
35'	20	275/35ZR20	102(XL)	Y	9.5	700	278	D	C	73	B
35'	20	255/35ZR20	97(XL)	Y	9	686	260	D	A	72	B
35'	20	245/35ZR20	95(XL)	Y	8.5	680	248	D	A	72	B
35'	20	235/35ZR20	92(XL)	W	8.5	672	241	D	A	72	B
35'	20	225/35ZR20	93(XL)	Y	8	666	230	D	A	72	B
35'	19	275/35ZR19	96	Y	9.5	675	278	D	A	72	B
35'	19	265/35ZR19	98(XL)	Y	9.5	669	271	D	A	72	B
35'	19	255/35ZR19	96(XL)	Y	9	661	260	D	A	72	B
35'	19	245/35ZR19	93(XL)	Y	8.5	656	248	D	A	72	B
35'	19	235/35ZR19	91(XL)	Y	8.5	647	241	D	A	72	B
35'	19	225/35ZR19	88(XL)	Y	8	641	230	D	A	72	B
35'	19	215/35ZR19	85(XL)	Y	7.5	633	218	D	A	72	B
35'	18	275/35ZR18	95	Y	9.5	649	278	D	C	72	B
35'	18	275/35ZR18	95	H	9.5	649	278	D	C	72	B
35'	18	265/35ZR18	97(XL)	Y	9	637	260	D	A	72	B
40'	20	245/40ZR20	95	Y	8.5	704	248	D	C	71	B
40'	19	275/40ZR19	101	Y	9.5	703	278	D	A	72	B
40'	19	255/40ZR19	100(XL)	Y	9	687	260	C	A	72	B
40'	19	245/40ZR19	98(XL)	Y	8.5	679	248	D	A	72	B
40'	19	225/40ZR19	93(XL)	Y	8	663	230	D	A	72	B
40'	18	245/40ZR18	97(XL)	W	8.5	653	248	C	A	72	B
40'	18	245/40ZR18	97(XL)	H	8.5	653	248	D	C	72	B
40'	18	235/40ZR18	95(XL)	W	8.5	645	241	C	A	72	B
40'	18	235/40ZR18	95(XL)	H	8.5	645	241	D	C	72	B
40'	18	225/40ZR18	92(XL)	W	8	637	230	D	A	72	B
40'	18	225/40ZR18	92(XL)	H	8	637	230	D	C	72	B
40'	18	215/40ZR18	89(XL)	W	7.5	629	218	D	A	72	B
40'	18	215/40ZR18	89(XL)	H	7.5	629	218	D	C	72	B
40'	17	255/40ZR17	94	W	9	636	260	D	A	72	B
40'	17	255/40ZR17	94	V	9	636	260	D	C	72	B
40'	17	255/40ZR17	94	W	8.5	628	248	D	A	71	B
40'	17	245/40ZR17	91	W	8.5	628	248	D	C	71	B
40'	17	245/40ZR17	91	V	8.5	628	248	D	C	71	B
40'	17	235/40ZR17	90	W	8.5	620	241	D	A	71	B

Series	Inch	Size	Load Index	Speed Index	Rim Width (mm)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise (dB)	Noise Class
35'	18	265/35R18	93	H	9.5	643	271	D	C	72	B
35'	18	255/35R18	94(XL)	W	9	635	260	D	A	72	B
35'	18	255/35R18	94(XL)	H	9	635	260	D	C	72	B
35'	18	245/35R18	92(XL)	Y	8.5	629	248	D	A	72	B
35'	18	245/35R18	92(XL)	H	8.5	629	248	D	C	72	B
35'	18	225/35R18	87(XL)	Y	8	615	230	D	C	72	B
35'	18	225/35R18	87(XL)	H	8	615	230	D	C	72	B
35'	18	225/35R18	87(XL)	Y	8	615	230	D	C	72	B
35'	18	215/35R18	84(XL)	Y	7.5	607	218	D	A	72	B
35'	18	215/35R18	84(XL)	H	7.5	607	218	D	C	72	B
35'	18	205/35R18	81(XL)	H	7.5	601	212	D	C	72	B
35'	17	185/35R17	82(XL)	V	6.5	562	188	D	C	71	B
35'	17	165/35R17	75(XL)	V	6	548	170	D	C	72	B
35'	20	245/40ZR20	95	Y	8.5	704</					

Sportnex NS-25



--	--	--	--	--	--	--	--



- The pattern design with 4 wide linear grooves improves hydroplaning performance, and enhance driving safety.
- The longitudinal grooves within blocks strengthen drainage efficiency.
- The optimized noise prevention bars reduce tire road noise, and offer quietness for quality ride.
- Interleaved walls of the main grooves strengthen the grip and friction with road surface.
- Optimized silica formula in the tread rubber compound deliver better handling, braking, and wear.

NS-25 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
25'	22	295/25ZR22	97(XL)	Y	10.5	707	301	N/A			
	22	285/25ZR22	95(XL)	Y	10.5	701	295	N/A			
	22	265/30ZR22	97(XL)	W	9.5	719	271	N/A N/A	73	N/A	
	22	255/30ZR22	95(XL)	W	9	714	255	N/A N/A	73	N/A	
	22	245/30ZR22	95(XL)	W	8.5	707	248	N/A			
	22	245/30ZR22	92(XL)	W	8.5	707	248	N/A			
	22	235/30ZR22	90(XL)	Y	8.5	701	241	N/A			
	21	255/30ZR21	93(XL)	Y	9	687	260	N/A			
	21	245/30ZR21	91(XL)	Y	8.5	681	248	N/A			
	20	285/30ZR20	99(XL)	W	10	680	290	N/A N/A	75	N/A	
	20	275/30ZR20	97(XL)	W	9.5	674	278	N/A N/A	73	N/A	
	20	255/30ZR20	92(XL)	Y	9	664	260	N/A			
	20	245/30ZR20	90(XL)	Y	8.5	656	248	N/A			
	20	245/30ZR20	95(XL)	Y	8.5	656	248	N/A N/A	72	N/A	
	20	225/30ZR20	85(XL)	W	8	644	230	N/A			
	20	215/30ZR20	82(XL)	W	7.5	638	218	N/A			
	19	285/30ZR19	98(XL)	Y	10	655	290	N/A N/A	75	N/A	
	19	275/30ZR19	96(XL)	Y	9.5	649	278	N/A N/A	73	N/A	
	19	265/30ZR19	93(XL)	Y	9.5	643	271	N/A			
	19	255/30ZR19	91(XL)	Y	9	637	260	N/A N/A	73	N/A	
	19	245/30ZR19	89(XL)	Y	8.5	631	248	N/A			
	18	285/30R18	93	H	10	629	290	N/A			
	21	295/35ZR21	107(XL)	Y	10.5	739	301	N/A			
	21	275/35ZR21	103(XL)	Y	9.5	725	278	N/A N/A	73	N/A	
	20	315/35ZR20	110(XL)	Y	11	728	320	N/A N/A	75	N/A	
	20	275/35ZR20	102(XL)	Y	9.5	700	278	N/A N/A	73	N/A	
	20	265/35ZR20	99(XL)	Y	9.5	694	271	N/A N/A	73	N/A	
	20	255/35ZR20	97(XL)	Y	9	686	260	N/A N/A	73	N/A	
	20	245/35ZR20	97(XL)	Y	8.5	680	248	N/A N/A	72	N/A	
	20	245/35ZR20	95(XL)	Y	8.5	680	248	N/A			
	20	235/35ZR20	92(XL)	W	8.5	672	241	N/A			
	20	225/35ZR20	93(XL)	W	8	666	230	N/A			
	20	225/35ZR20	90(XL)	W	8	666	230	N/A			
	19	275/35ZR19	96	Y	9.5	675	278	N/A N/A	72	N/A	
	19	265/35ZR19	98(XL)	Y	9.5	669	271	N/A N/A	73	N/A	
	19	255/35ZR19	96(XL)	Y	9	661	260	N/A N/A	73	N/A	
	19	245/35ZR19	93(XL)	Y	8.5	656	248	N/A N/A	72	N/A	
	19	235/35ZR19	91(XL)	Y	8.5	647	241	N/A N/A	72	N/A	

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
35'	19	225/35ZR19	88(XL)	Y	8	641	230	N/A N/A	72	N/A	
	19	215/35ZR19	85(XL)	Y	7.5	633	218	N/A			
	18	275/35R18	99(XL)	H	9.5	649	278	N/A			
	18	265/35ZR18	97(XL)	Y	9.5	643	271	N/A N/A	73	N/A	
	18	255/35ZR18	94(XL)	W	9	635	260	N/A N/A	73	N/A	
	18	255/35R18	94(XL)	H	9	635	260	N/A			
	18	245/35R18	92(XL)	H	8.5	629	248	N/A			
	18	225/35R18	87(XL)	H	8	615	230	N/A			
	18	215/35R18	84(XL)	H	7.5	607	218	N/A			
	18	205/35R18	81(XL)	H	7.5	601	212	N/A			
	18	165/35R18	82(XL)	V	6	573	170	N/A			
	17	225/35R17	86(XL)	V	8	590	230	N/A			
	17	185/35R17	82(XL)	V	6.5	562	188	N/A			
	17	165/35R17	75(XL)	V	6	548	170	N/A			
	21	245/40ZR21	100(XL)	Y	8.5	729	248	N/A			
	20	275/40ZR20	106(XL)	W	9.5	728	278	N/A			
	20	265/40ZR20	104(XL)	Y	9.5	720	271	N/A N/A	73	N/A	
	20	245/40ZR20	99(XL)	W	8.5	704	248	N/A N/A	72	N/A	
	19	275/40ZR19	101	Y	9.5	703	278	N/A N/A	72	N/A	
	19	255/40ZR19	100(XL)	Y	9	687	260	N/A N/A	73	N/A	
	19	245/40ZR19	98(XL)	Y	8.5	679	248	N/A N/A	72	N/A	
	19	235/40ZR19	96(XL)	Y	8.5	671	241	N/A N/A	72	N/A	
	19	225/40ZR19	93(XL)	Y	8	663	230	N/A N/A	72	N/A	
	18	275/40ZR18	99	W	9.5	677	278	N/A			
	18	275/40R18	99	H	9.5	677	278	N/A			
	18	265/40R18	101(XL)	H	9.5	669	271	N/A			
	18	255/40R18	99(XL)	H	9	661	260	N/A			
	18	245/40R18	97(XL)	Y	8.5	653	248	N/A N/A	72	N/A	
	18	245/40R18	97(XL)	H	8.5	653	248	N/A			
	18	235/40R18	95(XL)	Y	8.5	645	241	N/A N/A	72	N/A	
	18	235/40R18	95(XL)	H	8.5	645	241	N/A			
	18	225/40R18	92(XL)	W	8	637	230	N/A N/A	72	N/A	
	18	225/40R18	92(XL)	H	8	637	230	N/A			

<tbl_struct

NANKANG

NK COMFORT



NK COMFORT

Safety and Performance in Motion

NK COMFORT

RX-615



- Four straight broad grooves offer drainage efficiency and upgrade the safety on wet ground.
- The sub-straight grooves on the shoulder reduce the rigidity and prevent uneven wear happens.
- Multi sipes design reduces the rigidity of the tread and enhances the driving comfort.
- The lateral groove design curbs the generation of pattern noise.
- The pitch is designed with 5-pitch computer simulation to provide quiet and luxurious driving experience.

RX-615 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise Value (dB)	Noise Class
45'	17	215/45R17	91(XL)	V	7	626	213				N/A
	16	205/45R16	87(XL)	V	7	590	206				N/A
50'	15	205/50R15	86	V	6.5	587	214	D	C	69	B
	15	195/50R15	82	V	6	577	201				N/A
55'	16	225/55ZR16	95	W	7	654	233				N/A
	16	215/55R16	93	V	7	642	226	D	C	69	B
60'	16	205/55R16	94(XL)	V	6.5	632	214				N/A
	16	185/55R16	83	V	6	610	194	D	C	69	B
65'	15	195/55R15	85	V	6	595	201				N/A
	14	185/55R14	80	H	6	560	194				N/A
70'	16	225/60R16	98	V	6.5	676	228	D	C	69	B
	16	215/60R16	99(XL)	V	6.5	664	221	D	C	69	A
75'	16	205/60R16	96(XL)	V	6	652	209				N/A
	16	205/60R16	96(XL)	H	6	652	209				N/A
80'	15	225/60R15	96	V	6.5	651	228	D	C	69	B
	15	215/60R15	94	V	6.5	639	221	D	C	69	B
85'	15	215/60R15	94	H	6.5	639	221	D	C	69	B
	15	205/60R15	91	V	6	627	209	D	C	69	B
90'	15	205/60R15	91	H	6	627	209				N/A
	15	195/60R15	88	V	6	615	201				N/A
95'	15	195/60R15	88	H	6	615	201	D	C	69	B
	14	215/60R14	91(WL)	H	6.5	614	221	D	C	69	B
100'	14	215/60R14	91	H	6.5	614	221	D	C	69	B
	14	205/60R14	88	H	6	602	209				N/A
105'	13	195/60R14	86	H	5.5	578	189				N/A
	13	205/60R13	86	H	6	576	209				N/A
110'	13	185/60R13	80	H	5.5	552	189				N/A

N/A = Values are not available at the time of publication.

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise Value (dB)	Noise Class
16	215/65R16	98	V	6.5	686	221					N/A
	16	205/65R16	95	V	6	672	209	D	C	69	B
15	215/65R15	96	H	6.5	661	221	D	C	69	B	
	15	215/65R15	96	V	6.5	661	221	D	C	69	B
15	205/65R15	94	V	6	647	209					N/A
	15	205/65R15	94	H	6	647	209	D	C	69	B
15	195/65R15	91	H	6	635	201	D	C	69	B	
	15	195/65R15	91	V	6	635	201				N/A
14	185/65R15	88	H	5.5	621	189	D	C	69	B	
	14	185/65R15	86	H	5.5	596	189	D	C	69	B
14	175/65R14	82	H	5	584	177					N/A
	14	155/65R14	75(WR)	H	4.5	558	157	D	C	69	B
13	155/65R13	73	T	4.5	532	157					N/A
	14	205/70R14	95	H	6	644	209	D	C	69	B
14	195/70R14	91	H	6	630	201	D	C	69	B	
	14	185/70R14	88	H	5.5	616	189	D	C	69	B
14	175/70R14	84	H	5	602	177	D	C	69	B	
	13	185/70R13	86	H	5.5	590	189	D	C	69	B
13	175/70R13	82	H	5	576	177					N/A
	13	165/70R13	79	T	5	562	170				N/A
13	155/70R13	75	T	4.5	548	157	D	C	69	B	
	13	145/70R13	71	T	4.5	534	150	D	C	69	B
13	145/80R13	75	S	4	562	145	D	C	69	B	
	12	145/80R12	74	S	4	537	145				N/A

N/A = Values are not available at the time of publication.

NK COMFORT

N-729



- Four straight broad grooves offer drainage efficiency and upgrade the safety on wet ground.
- The sub-straight grooves on the shoulder reduce the rigidity and prevent uneven wear happens.
- Multi sipes design reduces the rigidity of the tread and enhances the driving comfort.
- The lateral groove design curbs the generation of pattern noise.
- The pitch is designed with 5-pitch computer simulation to provide quiet and luxurious driving experience.

N-729 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise Value (dB)	Noise Class
15	295/50R15	108(WL)	H	9.5	677	309	D	B	74	B	
	15	265/50R15	99(WL)	H	8.5	647	277	D</			

NNANKANG

ECONEX

ECONEX



N Safety and Performance in Motion



econex NA-1



- Light-weight profile and narrow tread width design reduce rolling resistance.
- The enlarged third section of tread radius lessen contact pressure of tread shoulder, and further reduce the noise generated from the lateral grooves on tread shoulder.
- NA-1 adopts uniquely asymmetric pattern design. The inside pattern stresses on drainage performance. Larger void ratio improves drainage performance on wet roads
- The outside pattern emphasizes on maneuverability. The larger pattern blocks on tread shoulder offers better cornering handling.
- Noise prevention bar on the lateral grooves of outside tread shoulder block airflow in the grooves to reduce the derived noise.
- Chamfered groove wall design scarifies the water film for getting better wet grip.

NA-1 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise Value (dB)	
45'	15	165/45R15	72(XL)	V	5.5	529	165	D	B	70	B
	16	195/50R16	88(XL)	V	6	602	201	C	B	70	B
50'	16	185/50R16	81	V	6	592	194	D	B	70	B
	15	195/50R15	82	V	6	577	201	D	B	70	B
	15	175/50R15	75	H	5.5	557	182	D	B	70	B
	13	175/50R13	72	V	5.5	506	182			N/A	
	20	195/55R20	95(XL)	H	6	722	201	B	B	70	B
	20	175/55R20	85	Q	5.5	700	182	C	B	70	B
	16	205/55Z16	91	W	6.5	632	214	C	B	70	B
	16	205/55R16	94(XL)	V	6.5	632	214	C	B	70	B
	16	195/55R16	87	V	6	620	201	D	B	70	B
	15	205/55R15	88	V	6.5	607	214	D	B	70	B
	15	195/55R15	85	V	6	595	201	D	B	70	B
	15	185/55R15	86(XL)	V	6	585	194	C	B	70	B
	15	185/55R15	82	V	6	585	194	D	B	70	B
55'	15	175/55R15	77	V	5.5	573	182	D	B	70	B
	15	165/55R15	75	V	5	563	170			N/A	
	14	185/55R14	80	H	6	560	194	D	B	70	B
	14	165/55R14	72	V	5	538	170			N/A	
	14	155/55R14	69	V	5	526	162			N/A	
	13	165/55R13	70	H	5	512	170	D	B	70	B
	20	155/60R20	80	Q	4.5	567	157	C	B	70	B
	19	175/60R19	86	Q	5	693	177	C	B	70	B
	16	215/60R16	99(XL)	V	6.5	664	221			N/A	
	16	215/60R16	99(XL)	H	6.5	664	221	B	B	71	B
	16	205/60Z16	96(XL)	W	6	652	209	C	B	70	B
	16	205/60R16	96(XL)	V	6	652	209	C	B	70	B
	16	205/60R16	96(XL)	H	6	652	209	C	B	70	B
	16	195/60R16	89	H	6	640	201	D	B	70	B
	16	185/60R16	86	H	5.5	628	189	D	B	70	B
	16	175/60R16	82	H	5	616	177	D	B	70	B
60'	15	235/60R15	98	S	7	663	240	C	B	71	B
	15	225/60R15	96	V	6.5	651	228	C	B	71	B
	15	205/60R15	95(XL)	V	6	627	209	D	B	70	B
	15	205/60R15	91	H	6	627	209	C	B	70	B
	15	195/60R15	88	V	6	615	201	D	B	70	B
	15	195/60R15	88	H	6	615	201	D	B	70	B
	15	185/60R15	88(XL)	H	5.5	603	189	C	B	70	B

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise Value (dB)	Noise Class
60'	15	185/60R15	84	H	5.5	603	189	D	B	70	B
	15	175/60R15	81	H	5	591	177	D	B	70	B
	15	165/60R15	77	H	5	579	170	D	B	70	B
	15	155/60R15	74	V	4.5	567	157			N/A	
	14	195/60R14	86	H	6	590	201	D	B	70	B
	14	185/60R14	82	H	5.5	578	189	C	B	70	B
	14	175/60R14	79	H	5	566	177	D	B	70	B
	14	165/60R14	75	H	5	554	170			N/A	
	13	205/60R13	86	H	6	576	209	D	B	70	B
	13	185/60R13	80	H	5.5	552	189	D	B	70	B
65'	13	175/60R13	77	H	5	540	177	D	B	70	B
	13	165/60R13	77(XL)	H	5	528	170			N/A	
	15	215/65R15	100(XL)	H	6.5	661	221	C	B	71	B
	15	205/65R15	99(XL)	H	6	647	209	C	B	70	B
	15	205/65R15	94	V	6	647	209	C	B	70	B
	15	195/65R15	95(XL)	H	6	635	201	C	B	70	B
	15	195/65R15	91	V	6	635	201	C	B	70	B
	15	195/65R15	91	H	6	635	201	C	B	70	B
	15	185/65R15	92(XL)	H	5.5	621	189	C	B	70	B
	15	175/65R15	88(XL)	H	5	609	177	C	B	70	B
70'	15	165/65R15	81	T	5	595	170			N/A	
	15	145/65R15	72	V	4.5	569	150			N/A	
	14	195/65R14	89	H	6	610	201	D	B	70	B
	14	185/65R14	86	H	5.5	596	189	C	B	70	B
	14	175/65R14	86(XL)	T	5	584	177	C	B	70	B
	14	175/65R14	82	T	5	584	177	D	B	70	B
	14	165/65R14	79	H	5	570	170	D	B	70	B
	14	155/65R14	75(WL)	S	4.5	558	157			N/A	
	14	155/65R14	75	V	4.5	558	157			N/A	
	13	165/65R13	77	H	5	544	170	D	B	70	B
80'	13	155/65R13	73	T	4.5	532	157	D	B	70	B

econex ECO-2+



- Excellent dispersible silica and unique crosslinking agents reduce rolling resistance substantially as well as enhances wet grip.
- The "Chain-End Notification" technology used in synthetic rubber strengthens fuel saving and traction.
- HA-oil-free formula for all sizes conforms with EU environmental protection laws.
- Center sub grooves with shallower depth enhance vertical/lateral block stiffness to avert block deformation and further reduce energy consumption.
- Shoulder groove bottom with big angle design retain shoulder block continuity, weaken block wriggling, and reduce energy consumption.
- Two section lateral grooves design on shoulder profile prevent uneven tread wear and provides adequate traction.
- Four circumferential grooves enhances drainage performance and safety on wet road.
- Center rib design reinforces straight driving and handling performance.
- Circumferential rib design on tread shoulder, with thin sipes instead of run-through lateral grooves, prevents groove resonance and reduce noise generated by run-through lateral grooves.

ECO-2+ Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (mm)	OD (mm)	SW (mm)	EU TIRE LABEL			
					(Inch)			RRC	Wet Grip	Noise Value (dB)	Noise Class
40'	18	245/40ZR18	97(XL)	Y	8.5	653	248	D	B	72	B
	18	245/40R18	97(XL)	H	8.5	653	248	D	B	72	B
	18	235/40ZR18	95(XL)	W	8.5	645	241	C	B	72	B
	18	235/40R18	95(XL)	H	8.5	645	241	D	B	72	B
	18	225/40ZR18	92(XL)	W	8	637	230	D	B	72	B
	18	225/40R18	92(XL)	H	8	637	230	D	B	72	B
	19	275/45ZR19	108(XL)	Y	9	731	273	C	B	73	B
	19	255/45ZR19	104(XL)	Y	8.5	713	255	C	B	73	B
	19	245/45ZR19	102(XL)	Y	8	703	243	C	B	72	B
	19	235/45ZR19	95	Y	8	695	236	C	B	71	B
45'	18	225/45ZR18	95(XL)	W	7.5	659	225	C	B	72	B
	18	215/45ZR18	93(XL)	W	7	651	213	C	B	72	B
	18	215/45R18	93(XL)	H	7	651	213			N/A	
	17	225/45ZR17	94(XL)	W	7.5	634	225	D	B	72	B
	17	225/45ZR17	94(XL)	Y	7.5	634	225	D	B	72	B
	17	225/45R17	94(XL)	V	7.5	634	225	D	B	72	B
	17	215/45R17	91(XL)	V	7	626	213	D	B	72	B
	16	205/45ZR16	87(XL)	W	7	590	206	C	B	72	B
	19	235/50ZR19	99	W	7.5	719	245	D	B	71	B
	18	245/50ZR18	100	W	7.5	703	253	D	B	71	B
50'	18	235/50ZR18	101(XL)	Y	7.5	693	245	C	B	72	B
	18	235/50R18	101(XL)	H	7.5	693	245			N/A	
	16	205/50R16	87	V	6.5	612	214	C	B	71	B
	15	165/50R15	72	V	5	547	170			N/A	
	15	165/50R15	72	V	5	547	170			N/A	

Series	Inch	Size	Load Index	Speed Index	Rim Width (mm)	OD (mm)	SW (mm)	EU TIRE LABEL			
					(Inch)			RRC	Wet Grip	Noise Value (dB)	Noise Class
55'	19	235/55R19	105(XL)	V	7.5	741	245	D	B	72	B
	18	235/55R18	104(XL)	V	7.5	715	245	C	B	72	B
	17	215/55R17	98(XL)	V	7	668	226	C	B	72	B
	16	205/55R16	91	V	6.5	632	214	D	B	71	B
	16	205/55R16	94(XL)	V	6.5	632	214	D	B	72	B
	16	195/55R16	87	V	6	620	201	D	B	71	B
	16	195/55R16	91(XL)	V	6	620	201	D	B	71	B
	16	185/55R16	87(XL)	V	6	610	194	C	B	71	B
	15	185/55R15	86(XL)	V	6	585	194	D	B	71	B
	14	165/55R14	72	V	5	538	170			N/A	
60'	18	235/60R18	107(XL)	V	7	739	240	D	B	72	B
	17	225/60R17	99	H	6.5	702	228	D	B	71	B
	17	215/60R17	96	H	6.5	690	221	D	B	71	B
	16	225/60R16	98	V	6.5	676	228	C	B	71	B
	16	215/60R16	99(XL)	V	6.5	664	221	C	B	72	B
	16	205/60R16	96(XL)	V	6	652	209	D	B	72	B
	16	205/60R16	96(XL)	H	6	652	209	D	B	72	B
	16	195/60R16	89	H	6	640	201	D	B	71	B
	16	185/60R16	86	H	5.5	628	189	D	B	70	B
	•15	165/60R15	77(WS)	H	5	579	170			N/A	
65'	15	165/60R15	77	H	5	579	170	D	B	70	B
	13	155/60R13	70	H	4.5	516	157			N/A	
	13	135/60R13	62	T	4	492	138	E	C	70	B
	12	165/60R12	75(XL)	H	5	503	170	D	B	70	B
	12	165/60R12	71	H	5	503	170			N/A	
	17	225/65R17	102	V	6.5	724	228	D	B	71	B
	16	195/65R16	92	V	6	660	201	D	B	71	B
	15	205/65R15	95	H	6	647	209	D	B	71	B
	15	195/65R15	91	H	6	635	201	D	B	71	B
	15	185/65R15	88	H	5.5	621	189	D	B	70	B
70'	15	175/65R15	88(XL)	H	5	609	177	D	B	71	B
	13	145/70R13	71	T	4.5	534	150	D	B	70	B
	10	165/70R10	72	H	5	486	170	D	B	70	B
80'	13	135/80R13	70	T	3.5	546	133	D	B	70	B

N/A = Values are not available at the time of publication.
• WS = White Sidewall



econex NEV-1



- Asymmetric pattern design with four circumferential grooves emphasize drainage performance on inside tread for getting better wet performance.
- Lateral groove design on center rib optimizes block stiffness and enhances comfort.
- Interlaced lateral grooves on outside intermediate tread block can preserve block stiffness and enhance handling performance.
- Narrow lateral groove design and the application of 80 pitch arrangement can reduce pattern noise effectively.
- The noise prevention bar on the bottom of lateral grooves can disturb air flow and reduce noise generation from lateral grooves.
- The oblique chamfering angle design applied on lateral grooves on tread shoulder can prevent irregular wear on the premise of keeping tread stiffness.
- Flat tread profile design can even tire contact pressure and further improve irregular wear.

NEV-1 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (mm)	OD (mm)	SW (mm)	EU TIRE LABEL			
				(Inch)			RRC	Wet Grip	Noise Value (dB)	Noise Class	

<tbl_r cells

NANKANG

Rollnex



Rollnex

NANKANG Safety and Performance in Motion

Rollnex NEX-1



- Tire noise simulation with introduction of optimized arrangement technology can use different pitch design based on outer diameter.
- Optimized proportion of rib patterns can widen ribs on tread shoulder to decrease its contact pressure and enhance wet performance by 3%.
- Half section of lateral grooves and sipe dislocation design can avoid mutual penetrations from lateral patterns to reduce noise generation.
- Blocking-up design on tread shoulder to restrain road noise caused by airflow circulating on tread pattern.
- Increase drainage space in grooves to enhance safety on wet roads in rainy days.

NEX-1 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise Value (dB)	Noise Class
35'	22	315/35ZR22	111(XL)	Y	11	779	320	C	A	73	B
40'	22	275/40ZR22	108(XL)	Y	9.5	779	278	C	A	73	B
45'	20	255/45ZR20	105(XL)	Y	8.5	738	255			N/A	
	19	235/45ZR19	95	W	8	695	236	C	A	71	B
	20	235/50ZR20	104(XL)	W	7.5	744	245	C	A	72	B
50'	18	235/50R18	101(XL)	V	7.5	693	245	B	A	72	B
	18	225/50R18	95	V	7	683	233	C	A	71	B
55'	20	235/55ZR20	102	W	7.5	766	245	C	A	71	B
	18	235/60R18	107(XL)	V	7	739	240	B	A	72	B
60'	18	225/60R18	100	V	6.5	727	228	C	A	71	B
	17	215/60R17	96	V	6.5	690	221	C	A	71	B
65'	17	225/65R17	102	V	6.5	724	228	C	A	71	B
	17	175/65R17	87	V	5	660	177	C	A	70	B

N/A =Values are not available at the time of publication.

Rollnex SP-9



Low Noise

Tread Life

- Four straight wide grooves enhance tire drainage efficiency and maneuverability on wet road condition.
- The optimized evenly thin sipes reduce road impact and improve the comfort when driving.
- Center rib design offers steady handling.
- The 5 pitches computer simulation technology decreases noise at high speed.

SP-9 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (mm)	OD (mm)	SW (mm)	EU TIRE LABEL			
			(Inch)					RRC	Wet Grip	Noise Value (dB)	Noise Class
35'	22	325/35ZR22	114(XL)	Y	11.5	787	331	N/A			
	21	315/35ZR21	111(XL)	Y	11	753	320	C	B	75	B
	21	295/35ZR21	107(XL)	W	0	0	0	N/A			
	21	295/35ZR21	107(XL)	Y	10.5	739	301	C	B	75	B
	22	295/40ZR22	112(XL)	Y	10.5	795	301	N/A			
	22	285/40ZR22	110(XL)	Y	10	787	290	C	B	75	B
	22	275/40ZR22	108(XL)	Y	9.5	779	278	C	B	73	B
	22	265/40ZR22	106(XL)	Y	9.5	771	271	C	B	73	B
	22	265/40R22	106(XL)	V	9.5	771	271	N/A			
	21	315/40ZR21	111	Y	11	785	320	C	B	74	B
	21	295/40ZR21	111(XL)	W	10.5	769	301	C	B	75	B
	21	285/40ZR21	109(XL)	Y	10	761	290	C	B	75	B
	21	275/40ZR21	107(XL)	Y	9.5	753	278	C	B	73	B
	21	265/40ZR21	105(XL)	Y	9.5	745	271	C	B	73	B
	20	295/40ZR20	110(XL)	Y	10.5	744	301	C	B	75	B
	20	285/40ZR20	108(XL)	Y	10	736	290	C	B	75	B
	20	275/40R20	106(XL)	V	9.5	728	278	N/A			
	20	235/40ZR20	96(XL)	Y	8.5	696	241	C	B	72	B
	16	205/40R16	83(XL)	V	7.5	570	212	N/A			
	22	285/45ZR22	114(XL)	Y	9.5	815	285	C	B	75	B
	22	285/45R22	114(XL)	V	9.5	815	285	N/A			
	21	285/45ZR21	113(XL)	Y	9.5	789	285	C	B	75	B
	21	275/45ZR21	110(XL)	Y	9	781	273	C	B	73	B
	21	275/45ZR21	110(XL)	W	9	781	273	C	B	73	B
	21	265/45R21	104	V	9	771	266	N/A			
	21	255/45ZR21	105(XL)	W	8.5	763	255	C	B	72	B
	20	285/45ZR20	112(XL)	Y	9.5	764	285	C	B	75	B
	20	275/45ZR20	110(XL)	Y	9	756	273	C	B	73	B
	20	275/45R20	110(XL)	H	9	756	273	N/A			
	20	275/45R20	110(XL)	V	9	756	273	C	B	73	B
	20	265/45ZR20	108(XL)	Y	9	746	266	C	B	73	B
	20	265/45R20	108(XL)	V	9	746	266	N/A			
	20	255/45ZR20	105(XL)	W	8.5	738	255	C	B	72	B
	19	285/45ZR19	111(XL)	Y	9.5	739	285	C	B	75	B
	19	255/45ZR19	104(XL)	W	8.5	713	255	C	B	72	B
	16	225/45R16	89	W	7.5	608	225	N/A			
	16	215/45R16	90(XL)	V	7	600	213	N/A			
	16	195/45R16	84(XL)	V	6.5	582	195	N/A			
	15	185/45R15	75	V	6	547	183	N/A			




Low Noise

Tread Life

SP-9 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (mm)	OD (mm)	SW (mm)	EU TIRE LABEL			
			(Inch)					RRC	Wet Grip	Noise Value (dB)	Noise Class
55'	20	275/55R20	117(XL)	V	8.5	810	284	C	B	72	B
	20	275/55R20	113	H	8.5	810	284	N/A			
	20	265/55R20	113(XL)	V	8.5	800	277	C	B	73	B
	20	255/55R20	110(XL)	Y	8	788	265	C	B	73	B
	20	235/55R20	105(XL)	V	7.5	766	245	C	B	72	B
	19	275/55R19	111	W	8.5	785	284	C	B	72	B
	19	275/55R19	111	V	8.5	785	284	N/A			
	19	265/55R19	113(XL)	Y	8.5	775	277	C	B	73	B
	19	265/55R19	111(XL)	Y	8	763	265	C	B	73	B
	19	255/55R19	111(XL)	V	8	763	265	C	B	73	B
	19	245/55R19	107(XL)	H	7.5	753	253	C	B	72	B
	19	235/55R19	105(XL)	W	7.5	741	245	C	B	72	B
	19	235/55R19	105(XL)	V	7.5	741	245	D	B	72	B
	19	225/55R19	99	Y	7	731	233	C	B	71	B
	19	225/55R19	99	V	7	731	233	N/A			
	19	205/55R19	97(XL)	V	6.5	709	214	C	B	72	B
	18	255/55R18	109(XL)	W	8	737	265	C	B	73	B
	18	255/55R18	109(XL)	V	8	737	265	C	B	73	B
	18	235/55R18	104(XL)	V	7.5	715	245	C	B	72	B
	18	225/55R18	98	V	7	705	233	C	B	71	B
	18	225/55R18	102(XL)	V	7	705	233	N/A			
	18	215/55R18	99(XL)	V	7	693	226	C	B	72	B
	17	275/55R17	109	V	8.5	734	284	C	B	72	B
	17	235/55R17	99	V	7.5	690	245	N/A	N/A		
	17	235/55R17	103(XL)	V	7.5	690	245	C	B	72	B
	17	225/55R17	101(XL)	V	7	680	233	N/A			
	17	215/55R17	98(XL)	V	7	668	226	C	B	72	B
	16	205/55R16	91	H	6	672	209	N/A			
	16	195/55R16	92	H	6	660	201	N/A			
	15	215/55R15	96</td								

Rollnex AT-5

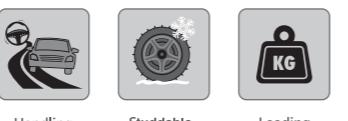

- Zigzag grooves design increase the lateral contact area, AT-5 provides the friction performance on mud, snow and gravel roads, and increase the driving force on poor road.
- Center rib interlocked pattern design to enhance stability.
- To avoid the gravel remains in the grooves and damage the tire, the stepped center sub grooves wall design with polygon edge can pop up with gravel.
- To get rid of mud and gravel, the stone ejector designed for the main grooves bottom and groove wall at tire shoulder.
- To balance and avoid abnormal tire wear, the connecting bar design between patterns can enhance the pattern block rigidity.
- The AT-5 with high amount of silica can increase the stability on snow condition.

AT-5 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL		
								RRC	Wet Grip	Noise Value (dB)
45'	20	275/45R20	110(WL)	S	9	756	273			N/A
	20	285/50R20	116(WLXL)	T	9	794	297			N/A
50'	20	285/50R20	116(XL)	T	9	794	297			N/A
	20	265/50R20	112(WLXL)	T	8.5	774	277			N/A
55'	20	265/50R20	112(XL)	T	8.5	774	277			N/A
	20	275/55R20	117(XL)	T	8.5	810	284			N/A
60'	18	255/55R18	109(OW)	T	8	737	265			N/A
	20	275/60R20	115	T	8	838	279			N/A
65'	18	285/60R18	116	H	8.5	799	292			N/A
	18	285/60R18	116(WL)	H	8.5	799	292			N/A
65'	18	265/60R18	110	T	8	775	272			N/A
	18	265/60R18	110(WL)	H	8	775	272			N/A
65'	18	255/60R18	112(XL)	H	7.5	763	260			N/A
	18	235/60R18	107(OW)	T	7	739	240			N/A
65'	17	235/60R17	102(OW)	T	7	714	240			N/A
	16	235/60R16	104(WLXL)	S	7	688	240			N/A
65'	16	235/60R16	104(XL)	H	7	688	240			N/A
	15	275/60R15	107(OW)	S	8	711	279			N/A
65'	15	255/60R15	102(OW)	S	7.5	687	260			N/A
	15	235/60R15	98(OW)	S	7	663	240			N/A
65'	18	275/65R18	116(OW)	T	8	815	279			N/A
	18	265/65R18	114(OW)	T	8	801	272			N/A
65'	17	265/65R17	112(WL)	T	8	776	272			N/A
	17	265/65R17	112(OW)	T	8	776	272			N/A
65'	17	255/65R17	114(XL)	T	7.5	764	260			N/A
	17	245/65R17	111(OWXL)	T	7	750	248			N/A
65'	17	235/65R17	108(XL)	T	7	738	240			N/A

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL		
								RRC	Wet Grip	Noise Value (dB)
70'	18	265/70R18	114(OW)	S	8	829	272			N/A
	17	285/70R17	117	T	8.5	832	292			N/A
	17	285/70R17	117(WL)	T	8.5	832	292			N/A
	17	265/70R17	115(OW)	T	8	804	272			N/A
	17	255/70R17	112	T	7.5	790	260			N/A
	17	245/70R17	112(OWXL)	T	7	776	248			N/A
	17	235/70R17	109(XL)	T	7	762	240			N/A
	16	265/70R16	112(OW)	T	8	778	272			N/A
	16	255/70R16	112(OW)	S	7.5	764	260			N/A
	16	245/70R16	111(OWXL)	S	7	750	248			N/A
75'	16	205/70R16	97	Q	6	694	209			N/A
	15	265/70R15	112(OW)	S	8	753	272			N/A
	16	265/75R16	116(OW)	T	7.5	804	267			N/A
	15	235/75R15	109(OWXL)	T	6.5	733	235			N/A
	* 20	LT305/55R20	121/118	S	9.5	844	316			N/A
	* 20	LT295/65R20	129/126	Q	8.5	893	297			N/A
	20	LT295/65R20	121/118	Q	8.5	892	299			N/A
	* 20	LT295/60R20	126/123	R	8.5	862	299			N/A
	20	LT295/60R20	121/117	Q	8.5	862	299			N/A
	* 20	LT295/55R20	123/120	S	9.5	832	309			N/A
4WD	20	LT295/55R20	121/118	Q	9.5	832	309			N/A
	* 20	LT285/60R20	125/122	R	8.5	850	290			N/A
	20	LT285/60R20	121/119	Q	8.5	850	292			N/A
	* 20	LT285/55R20	122/119	S	9	822	297			N/A
	20	LT285/55R20	117/114	Q	9	822	297			N/A
	* 20	LT275/65R20	126/123(OW)	S	8	866	279			N/A
	* 20	35*12.50R20LT	121(OW)	S	10	877	318			N/A
	* 18	LT295/70R18	129/126	Q	8.5	871	299			N/A
	18	LT295/70R18	119/116	Q	8.5	871	299			N/A
	* 18	LT285/75R18	129/126	Q	8	885	286			N/A
VAN	18	LT285/75R18	121/118	Q	8	885	286			N/A
	18	LT285/65R18	121/118(OW)	S	8.5	827	290			N/A
	* 18	LT275/70R18	125/122(OW)	S	8	843	279			N/A
	18	LT275/70R18	121/118(OW)	Q	8	843	279			N/A
	* 18	LT275/65R18	123/120(OW)	S	8	815	279			N/A
	18	LT275/65R18	119/116(OW)	Q	8	815	279			N/A
	* 18	LT265/70R18	124/121(OW)	S	8	829	273			N/A
	18	LT265/70R18	121/118(OW)	Q	8	829	272			N/A
	* 18	35*12.50R18LT	123	S	10	877	318			N/A
	18	35*12.50R18LT	118	Q	10	832	318			N/A
17	17	LT315/70R17	121/1							

Rollnex R/T



- Center lugs designed in 4-in-1 block accounting for around 40% of tread width can enhance straight driving stability.
- Polygonal and tortuous pattern block design presents rough tread pattern style and can supply multi-directional traction while cornering.
- Zigzag lateral groove and stair-type noise-preventing bar design can reduce noise generated from vehicle moving.
- Stair-type tread pattern block design can discharge the stones lodged in grooves and upgrade wear performance in middle and late tire life.
- Interlocking tread shoulder design contributes to eject dirt and gravel, and also enhance traction performance on muddy surfaces.
- Connecting bar design among pattern blocks can strengthen block stiffness and prevent irregular tread wear.

R/T Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise Value (dB)	Noise Class
50'	20	285/50R20	116(WLXL)	T	9	794	297	D	C	75	B
	20	265/50R20	112(WLXL)	T	8.5	774	277	D	C	73	B
70'	16	245/70R16	111(WWXL)	S	7	750	248	D	C	72	B
4WD	* 18	LT265/60R18	119/116(WW)	Q	8	775	272			N/A	
	* 17	LT285/70R17	121/118(WW)	Q	8.5	832	292			N/A	
	* 17	LT265/70R17	121/118(WW)	Q	8	804	272			N/A	
	* 17	LT265/65R17	120/117(WW)	Q	8	776	272			N/A	
	* 16	LT285/75R16	126/123(WW)	K	8	834	286			N/A	
	* 16	LT285/75R16	126/123(WW)	N	8	834	286			N/A	
	* 16	LT265/75R16	112/109(WW)	Q	7.5	804	267			N/A	
	* 16	LT265/75R16	123/120(WW)	Q	7.5	804	267			N/A	
	* 16	LT265/70R16	117/114(WW)	Q	8	778	272			N/A	
	* 16	LT245/75R16	120/116(WW)	Q	7	774	248			N/A	

* = 3PLY Sidewall

N/A = Values are not available at the time of publication.

FT-9 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise Value (dB)	Noise Class
55'	18	235/55R18	104(WL)	T	7.5	715	245			N/A	
	17	225/60R17	99(WL)	T	6.5	702	228			N/A	
60'	16	215/60R16	99(WLXL)	T	6.5	664	221			N/A	
	16	205/60R16	96(WLXL)	T	6	652	209			N/A	
65'	16	175/60R16	82(WL)	H	5	616	177			N/A	
	15	185/60R15	88(WLXL)	H	5.5	603	189			N/A	
70'	15	165/60R15	77	S	5	579	168			N/A	
	15	165/60R15	77(WL)	S	5	579	168			N/A	
75'	17	245/65R17	111(WLXL)	T	7	750	248			N/A	
	17	225/65R17	102(WL)	T	6.5	724	228			N/A	
80'	16	195/65R16	92	S	6	660	201			N/A	
	15	195/65R15	91(WL)	T	6	635	201			N/A	
85'	15	165/65R15	81(WL)	S	5	595	170			N/A	
	14	165/65R14	79(WL)	S	5	570	170			N/A	
90'	13	155/65R13	73(WL)	S	4.5	532	157			N/A	
	16	225/70R16	103(WL)	S	6.5	722	228			N/A	
95'	16	215/70R16	100(WL)	T	6.5	708	221			N/A	
	15	205/70R15	96	Q	6	669	209			N/A	
100'	13	155/70R13	75(WL)	S	4.5	548	157			N/A	
	16	205/80R16	104(WLXL)	T	5.5	734	203			N/A	
105'	16	175/80R16	91(WL)	S	5	686	177			N/A	

Rollnex R/T FT-9



- Interlocking shoulder block design can grip and exclude scree and clods to increase maneuverability, and allow the car to be navigated freely on rugged roads.
- Hook-shaped blocks increase gripping thrust on scree and clods.
- The extended blocks on tread shoulders provide extra traction between blocks and scree.
- The prominent bar on the bottom of the grooves prevents stones are ledged in the grooves. Ledged stones will be expelled by the flexible moves between the prominent bar and the groove wall.
- Z-shaped zigzag grooves mill the clods and adopt to all kinds of rugged roads.

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise Value (dB)	Noise Class
* 18	LT265/60R18	119/116	Q	8	775	272					
* 17	LT265/65R17	120/117	Q	8	776	272					
17	35*12.50R17LT	119	Q	10	877	318					
16	LT315/12.50R16	121(OW)	Q	8.5	878	313					
16	LT285/75R16	122/119(OW)	M	8	834	286					
* 16	LT265/75R16	123/120(OW)	N	7.5	804	267					
16	LT265/70R16	117/114(OW)	Q	8	778	272					
16	LT255/70R16	115/112(OW)	Q	7.5	764	260					
16	LT245/75R16	120/116(OW)	N	7	774	248					
16	LT235/85R16	120/116(OW)	N	6.5	806	235					
16	LT205/80R16	110/108	O	5.5	734	202					
16	LT185/85R16	105/103(WL)	L	5	721	182					
16	LT185/85R16	105/103(WL)	L	5	721	182					
15	LT235/75R15	104/101(OW)	Q	6.5	733	235					
15	LT215/75R15	100/97(OW)	Q	6	703	216					
15	LT215/75R15	100/97(OW)	S	6	703	216					
* 15	37*12.50R15LT	118	N	10	928	318					
* 15	37*12.50R15LT	118	L	10	928	318					
15	35*12.50R15LT	113(OW)	Q	10	877	318					
15	33*12.50R15LT	108(WL)	Q								

Rollnex

MT-1



Loading



Handling

- Tire tread pattern design is aggressive and ruthless.
- The multilateral curved block of tire shoulder design provides traction in multiple directions when driving.
- The interlayer tire shoulder design effectively provide undeniable traction to bite gravel and mud sand when a tire drives on a poor road surface, thus increasing the maneuverability of the tire when driving on poor road surface.
- Its 50% groove area ratio design provide excellent traction ability on rugged road and enhances the ability to remove sediments on muddy roads.

MT-1 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL		
								RRC	Wet Grip	Noise Value (dB)
40'	22	295/40R22	112(WLXL)	T	10.5	795	301			N/A
	18	245/40R18	97(XL)	T	8.5	653	248			N/A
50'	18	235/50R18	101(WLXL)	S	7.5	693	245			N/A
55'	19	235/55R19	105(WLXL)	T	7.5	741	245			N/A
	18	225/55R18	98(WL)	T	7	705	233			N/A
60'	18	225/60R18	100(WL)	T	6.5	727	228			N/A
	17	195/60R17	90(WL)	S	6	666	201			N/A
	15	185/60R15	88(WLXL)	S	5.5	603	189			N/A
	15	165/60R15	77(WL)	S	5	579	168			N/A
65'	15	175/65R15	88(WLXL)	T	5	609	177			N/A
	14	185/65R14	86	H	5.5	596	189			N/A
	14	175/65R14	82(WL)	T	5	584	177			N/A
	14	155/65R14	75(WL)	S	4.5	558	157			N/A
70'	16	235/70R16	106(WL)	S	7	735	240			N/A
	13	165/70R13	79(WL)	T	5	562	170			N/A
80'	16	175/80R16	91(WL)	S	5	686	177			N/A
	13	145/80R13	75(WL)	S	4	562	145			N/A

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL		
								RRC	Wet Grip	Noise Value (dB)
4WD	* 26	37*13.50R26LT	114	Q	11	928	345			N/A
	* 24	35*12.50R24LT	114	Q	10	877	318			N/A
	* 22	37*13.50R22LT	128	Q	11	928	345			N/A
	* 22	35*12.50R22LT	121	Q	10	877	318			N/A
	* 22	33*12.50R22LT	114	Q	10	826	318			N/A
	* 20	LT305/55R20	121/118	Q	9.5	844	316			N/A
	* 20	LT285/55R20	122/119	P	9	822	317			N/A
	* 20	LT285/50R20	119/116	Q	9	794	297			N/A
	20	LT275/65R20	126/123	Q	8	866	279			N/A
	* 20	LT275/65R20	121/118	Q	8	866	279			N/A
	* 20	LT275/60R20	123/120(OW)	Q	8	838	279			N/A
	* 20	LT275/60R20	123/120(OW)	P	8	838	279			N/A
	* 20	LT275/55R20	120/117	P	8.5	810	284			N/A
	* 20	LT265/50R20	121/118	P	8.5	774	277			N/A
	* 20	38*13.50R20LT	128	Q	11	953	345			N/A
	* 20	35*12.50R20LT	121	Q	10	877	318			N/A
	* 20	33*12.50R20LT	114	P	10	826	318			N/A
	* 20	33*12.50R20LT	114	Q	10	826	318			N/A
	* 18	LT285/65R18	125/122(OW)	P	8.5	827	292			N/A
	18	LT275/70R18	121/118	Q	8	843	279			N/A
	* 18	LT275/70R18	125/122	Q	8	843	279			N/A
	* 18	LT275/65R18	123/120	Q	8	815	279			N/A
	18	LT275/65R18	119/116	Q	8	815	279			N/A
	* 18	LT265/60R18	119/116(OW)	P	8	775	272			N/A
	* 18	35*12.50R18LT	123	Q	10	877	318			N/A
	17	LT315/70R17	121/118	Q	9.5	874	323			N/A
	* 17	LT295/70R17	121/118	Q	8.5	846	297			N/A
	17	LT285/70R17	121/118	Q	8.5	832	292			N/A
	17	LT265/70R17	121/118(OW)	Q	8	804	272			N/A
	17	LT265/65R17	120/117(OW)	P	8	776	272			N/A
	17	LT255/75R17	111/108	Q	7	814	253			N/A
	17	35*12.50R17LT	121	Q	10	877	318			N/A
	17	33*12.50R17LT	114(WW)	Q	10	826	316			N/A
	16	LT315/75R16	121/118(OW)	Q	8.5	878	313			N/A
	16	LT305/70R16	118/115(OW)	Q	9	834	311			N/A
	* 16	LT305/70R16	124/121(OW)	Q	9	834	311			N/A
	* 16	LT285/75R16	126/123	Q	8	834	286			N/A
	16	LT285/75R16	116/113	Q	8	834	286			N/A
	* 16	LT265/75R16	123/120(OW)	K	7.5	804	267			N/A
	* 16	LT265/75R16	123/120(OW)	Q	7.5	804	267			N/A
	16	LT265/75R16	119/116(OW)	Q	7.5	804	267			N/A
	16	LT265/70R16	117/114(OW)	Q	8	778	272			N/A
	* 16	LT245/75R16	120/116(OW)	N	7	774	248			N/A
	* 16	LT235/85R16	120/116	Q	6.5	806	235			N/A
	16	LT185/85R16	105/103(WL)	N	5	721	184			N/A
	15	LT235/75R15	104/101(OW)	Q	6.5	733	235			N/A
	15	35*12.50R15LT	113	Q	10	877	318			N/A
	15	33*12.50R15LT	108(OW)	Q	10	826	318			N/A
	15	32*11.50R15LT	113(OW)	Q	9	801	290			N/A
	15	31*10.50R15LT	109(OW)	Q	8.5	775	268			


Rollnex N889



Studdable Loading

- Special rigid shoulder and sidewall design absorb the shake from rugged roads and reduces car bumping.
- Stud holes design suits to all terrain. Studs can be applied to enhance the maneuverability and braking if necessary.
- The computer-simulated blocks perform excellently on all kinds of road conditions.
- White letter sidewall shows unique and strong characteristics.

Rollnex N870



Loading

- Unique tire section profile can enhance tire stiffness and driving stability.
- Interlocking shoulder pattern and deep groove design suitable for all weather and terrains can supply excellent maneuverability.
- Directional block pattern design can exclude gravel sand and adjust to drive on all kinds of rugged roads including gravel and miriness.

N889 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise Value (dB)	Noise Class
4WD	17	LT265/70R17	112/109(OW)	Q	8	804	272				N/A
	* 17	LT265/70R17	121/118(OW)	N	8	804	272				N/A
	* 17	LT255/75R17	111/108(OW)	Q	7	814	253				N/A
	17	LT245/70R17	119/116(OW)	Q	7	776	248				N/A
	16	LT305/70R16	118/115(OW)	Q	9	834	311				N/A
	16	LT285/75R16	122/119(OW)	M	8	834	286				N/A
	16	LT265/75R16	112/109(OW)	N	7.5	804	267				N/A
	16	LT265/75R16	119/116(OW)	N	7.5	804	267				N/A
	16	LT245/75R16	108/104(OW)	N	7	774	248				N/A
	* 16	LT245/75R16	120/116(OW)	N	7	774	248				N/A
	* 16	LT235/85R16	120/116(OW)	N	6.5	806	235				N/A

* = 3PLY Sidewall

N/A = Values are not available at the time of publication.

N870 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	RRC	Wet Grip	Noise Value (dB)	Noise Class
LTR	16	37*12.50R16.5	127	M	8.25	928	318				N/A
	16	37*12.50R16.5	127	N	9.75	928	315				N/A

NANKANG

NK VAN

NK VAN



N Safety and Performance in Motion

NK VAN CW-30



- Main groove with taper recess design on both groove sides and bevel design on lateral groove wall allow tread to fit more closely on rugged road surface during rolling to prevent uneven tread wear.
- Sipe design on center rib can homogenize rib stiffness and further enhance wet performance.
- Enlarged tread shoulder block width ratio to overall tread width can increase contact area of tread shoulder and strengthen durability of tread shoulder.
- Shallowized lateral groove and sipe design on tread shoulder strengthen pattern block stiffness and further enhance endurance performance of tread shoulder.
- Broadened tread width design enlarges contact area, strengthen sidewall endurance and enhance tread wear mileage.

CW-30 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise Value (dB)	Noise Class
VAN	20	245/40R20C	109/107	R	8.5	704	244	D	C	72	B
	16	205/75R16C	113/111	R	5.5	714	203			N/A	
	16	195/75R16C	110/108	N	5.5	698	196			N/A	
	14	185R14C	102/100	R	5.5	650	188			N/A	
	13	165R13C	94/92	Q	4.5	596	167			N/A	

NK VAN CW-25



- Zigzag grooves decrease pattern noise and provide more comfortable drive.
- CW-25 is a new generation commercial tire which emphasizes on endurance and wear performance ability.
- Special tread compound increases mileage.
- The excellent pattern design enhances rigidity to provide the best loading capacity.



NK VAN CW-20



- Optimal lateral grooves reduce the noise generated from air consonance and increases riding comfort.
- Four-straight grooves ensure driving safety on wet ground.
- Shoulder rigidity enhancement prevents from irregularly wearing and is suitable for long distance driving.
- Sipes on the bottom of shoulder grooves keep tread soft and riding comfort in terminal wearing stage.

CW-25 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise Value (dB)	Noise Class
VAN	16	235/65R16C	121/119	R	7	712	240			N/A	
	16	225/75R16C	121/120	R	6	744	223	C	C	72	B
	16	195/75R16C	110/108	N	5.5	698	196			N/A	
	15	225/70R15C	116/114	Q	6.5	697	228			N/A	
	15	225/70R15C	112/110	S	6.5	697	228	C	C	72	B
	15	215/70R15C	109/107	R	6.5	683	221			N/A	
	15	195R15C	106/104	R	5.5	690	198	C	C	72	B
	15	195/80R15C	107/105	N	5.5	693	196	N/A	N/A	72	N/A
	15	195/70R15C	104/102	S	6	655	201	C	C	72	B
	15	185R15C	103/102	R	5.5	674	188	C	C	72	B
	15	185/75R15C	106/104	N	5	659	184			N/A	
	14	215R14C	112/110	R	6	700	218	C	C	72	B
	14	215/75R14C	112/110	Q	6	678	216			N/A	
	14	205R14C	109/107	R	6	686	208	C	C	72	B
	14	205/75R14C	109/107(WR)	S	5.5	664	203	C	C	72	B
	14	195R14C	106/104	S	5.5	666	198	C	C	72	B
	14	185R14C	102/100	R	5.5	650	188	C	C	72	B
	14	185/75R14C	102/100	P	5	634	184			N/A	
	14	175R14C	99/98	R	5	634	178	C	C	72	B
	14	175/65R14C	90/88	T	5	584	177	C	C	72	B
	14	165R14C	97/95	R	4.5	622	167	C	C	72	B
	14	165/70R14C	89/87	T	5	588	170	C	C	72	B
	13	185R13C	100/98	Q	5.5	624	188	C	C	72	B
	13	175R13C	97/95	Q	5	608	178	C	C	72	B
	13	165R13C	94/92	Q	4.5	596	167	C	C	72	B
	13	165/80R13C	94/92	Q	4.5	594	165			N/A	
	13	155R13C	91/89	T	4.5	578	157	C	C	72	B
	13	155R13C	90/88	R	4.5	578	157	C	C	72	B
	12	155R12C	88/86	Q	4.5	550	157	C	C	72	B
	12	145R12C	86/84	N	4	542	147	C	C	72	B
	12	145R12C	81/79	N	4	541	145			N/A	

N/A =Values are not available at the time of publication.

CW-20 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise Value (dB)	Noise Class
4WD	14	155/80R14LT	88/86	N	4.5	604	157			N/A	
	20	235/45R20C	117/115	R	8	720	236	C	C	72	B
	18	235/55R18C	117/115	R	7.5	715	245	C	C	72	B
	18	225/50R18C	107/105	T	7	683	233			N/A	
	18	225/50R18C	109/107	T	7	683	233	D	D	72	B
	18	215/55R18C	109/107	N	7	693	226	D	D	72	B
	17	235/60R17C	117/115	R	7	714	240	C	C	72	B
	17	225/55R17C	109/107	H	7	680	233	D	C	72	B
	17	215/65R17C	108/105	H	6.5	712	221	C	C	72	B
	17	215/60R17C	109/107	T	6.5	690	221	C	C	72	B
	16	235/65R16C	115/113	T	7	712	240	C	C	72	B
	16	235/65R16C	121/119	R	7	712	240	C	C	72	B
	16	225/65R16C	112/110	S	6.5	698	228	C	C	72	B
	16	215/75R16C	116/114	S	6	728	216	C	C	72	B
	16	215/70R16C	108/106	T	6.5	708	221	D	C	72	B
	16	215/65R16C	109/107	T	6.5	686	221	C	C	72	B
	16	215/60R16C	108/106	T	6.5	664	221	C	C	72	B
	16	205/75R16C	110/108	R	5.5	714	203	C	C	72	B
	16	205/75R16C	113/111	R	5.5	714	203	C	C	72	B
	16	205/65R16C	107/105	T	6	672	209	C	C	72	B
	16	195/75R16C	107/105	R	5.5	698	196	C	B	72	B
	16	195/75R16C	110/108	T	5.5	698	196	C	D	72	B
	16	195/65R16C	104/102	T	6	660	201	D	C	72	B
	16	195/60R16C	99/97	H	6	640	201	D	C	72	B
	16	185/75R16C	104/102	R	5	684	184	D	C	72	B
	16	175/75R16C	101/99	R	5	668	177	D	C	72	B
	15	225/70R15C	112/110(WS)	N	6.5	697	228	D	C	72	B
	15	215/70R15C	109/107	T	6.5	683	221	C	C	72	B
	15	215/65R15C	104/102	T	6.5	661	221	D	C	72	B
	15	205/70R15C	106/104	S	6	669	209	C	C	72	B
	15	205/65R15C	102/100	T	6	647	209	D	C	72	B
	15	195/80R15C	107/105(WS)	N	5.5	693	196			N/A	
	14	205/70R14C	102/100	P	6	644	209				

 NANKANG

TRUCK & BUS



TRUCK & BUS

 Safety and Performance in Motion

NK VAN TR-10



Tread Life Loading

- Three zigzag grooves contribute to excellent traction.
- Connective pattern on tread shoulder enhances tread stiffness and reinforces durability while high loading.
- Unique tread compound raises block stiffness and wear mileage.

TR-10 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL		
								RRC	Wet Grip	Noise Value (dB)
80'	10	145/80R10	69	S	4	486	145			N/A
4WD	13	145R13LT	82/80	N	4	569	145			N/A
VAN	13	145R13LT	86/84	N	4	569	145			N/A
	14	195/70R14C	104/102	N	6	630	201	D	C	72 B
	14	185R14C	104/102	N	5.5	650	188	D	C	72 B
	14	185/65R14C	93/91	N	5.5	596	189	D	C	72 B
	13	195/50R13C	104/102	N	6	526	201	D	C	72 B
	13	185/70R13C	106/104	N	5.5	590	189	D	C	72 B
	12	195/60R12C	104/102	N	6	539	201	D	C	72 B
	12	185/60R12C	104/101	N	5.5	527	189	D	C	72 B
	12	155/70R12C	104/102	N	4.5	523	157	D	C	72 B
	10	195/55R10C	98/96	P	6	468	201			N/A
	10	145R10C	84/82	N	4	491	145			N/A

N/A =Values are not available at the time of publication.

TRUCK & BUS NR066



Loading

- The computer simulated pitches reduce the generation of noise.
- The sidewall horizontal ratio is enlarged to ensure endurance, safety and smooth driving.
- The deeper tread grooves ensure great gripping ability and reduce the noise at the later stage of the tire use.

NR066 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL		
								RRC	Wet Grip	Noise Value (dB)
LTR	16	7.50R16	121/120	N	6	805	211	D	C	71 B
	16	7.50R16	122/120	L	6	805	211			N/A
	16	7.00R16	117/116	N	5.5	777	197	D	C	71 B
	16	6.50R16	108/107	N	5.5	750	185	D	B	68 A
	15	7.50R15	120/118	N	6	776	211	D	C	71 B
	15	7.00R15	111/109	N	5.5	752	197	D	C	71 B
	15	7.00R15	114/112	N	5.5	751	197	D	C	71 B
	15	6.50R15	103/102	N	5.5	722	187	D	B	68 A
VAN	16	6.00R16C	103/101	N	4.5	728	170	D	B	71 B

TRUCK & BUS HA858



Tread Life Loading

- The all-position tire is applicable to highways and other on-road ways.
- Four circumferential groove design can improve drainage performance so as to enhance wet handling
- Reinforcing structure design can extend tire life, driving safety and also provide superior maneuverability.
- Multi-angle groove wall design with bulged blocks on groove bottom can decrease the probability which gravel lodged in grooves to protect tread from harms, extend tire life and further reduce cost.

TRUCK & BUS HD757



Tread Life Loading Handling

- The drive axle tire is suitable for general pavement and unpaved road.
- The interacted pattern blocks at central part of tread and bulk pattern at the outside strengthen the draining function and provide traction, then further improve the performance when drive on diverse kinds of surface.
- Reinforced structure enhances the durability and safety of the tire, as well as provides excellent maneuverability.
- The depth of horizontal grooves at the tire shoulder area is optimized to reinforce the rigidity at the medium and later stage of abrasion, then further lengthen the service life of the tire and reduce the maintenance costs.

HA858 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL		
								RRC	Wet Grip	Noise Value (dB)
70'	19	245/70R19.5	136/134	J	7.5	839	248	D	C	70
	17	235/75R17.5	132/130	M	6.75	797	233	D	C	70
	17	225/75R17.5	129/127	M	6.75	783	226	D	C	70
75'	17	215/75R17.5	126/124	M	6	767	212	D	C	70
	17	205/75R17.5	124/122	M	6	753	205	D	C	70
	17	225/80R17.5	123/122	L	6.75	805	226	D	C	70
80'	17	9.5R17.5	129/127	L	6.75	842	240	D	C	70
	17	8.5R17.5	121/120	L	6	802	215	D	C	70
	16	8.25R16	127/125	L	6.5	860	233	D	C	70
95'	16	8.25R16	131/129	J	6.5	860	230	D	C	70
	16	7.50R16	123/122	K	6	805	211	D	C	70
	16	205/85R16	117/115	N	5.5	754	201	D	C	72
4WD	16	195/85R16	114/112	N	5.5	738	196	D	C	72
	16	185/85R16	111/109	N	5	720	182			N/A
	16	7.00R16	117/116	N	5.5	784	198			N/A
VAN	15	7.00R15	114/112	N	5	746	197			N/A
	15	195/75R15	109/107	L	5.5	673	194			N/A
	15	175/75R15	103/101	L	5	643	175			N/A

N/A =Values are not available at the time of publication.

HD757 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL		
								RRC	Wet Grip	Noise Value (dB)
70'	19	245/70R19.5	136/134	J	7.5	839	248	E	C	73
	17	235/75R17.5	132/130	M	6.75	797	233	E	C	73
	17	225/75R17.5	129/127	M	6.75	783	226	E	C	73
75'	17	215/75R17.5	126/124	M	6	767	212	E	C	73
	17	205/75R17.5	124/122	M	6	753	205	E	C	73
	17	225/80R17.5	123/122	L	6.75	805	226	E	C	73
80'	17	9.5R17.5	129/127	L	6.75	842	240	D	C	70
	17	8.5R17.5	121/120	L	6	802	215	D	C	70
	16	8.25R16	127/125	L	6.5	860	233	D	C	70
95'	16	8.25R16	131/129	J	6.5	860	230	D	C	70
	16	7.50R16	123/122	K	6	805	211	E	C	73
	16	215/85R16	120/118	N	6	772	216			N/A
4WD	16	205/75R16	113/111	N	5.5	714	203			N/A
	16	205/70R16	111/109	N	6	696	206			N/A
	16	185/85R16	111/109	N	5	720	182			N/A
LTR	16	7.50R16	122/120	L	6	805	211			N/A

N/A =Values are not available at the time of publication.